

**Model:** C450 D5e  
**Frequency:** 50  
**Fuel Type:** Diesel

» Generator set data sheet



Our energy working for you.™

<b>Spec sheet:</b>	SS11-CPGK
<b>Noise data sheet (Open/enclosed):</b>	ND50-OS550 / ND50-CS550
<b>Airflow data sheet:</b>	AF50-550
<b>Derate data sheet (Open/enclosed):</b>	DD50-OS550 / DD50-CS550
<b>Transient data sheet:</b>	TD50-550

<b>Fuel consumption</b>	Standby				Prime			
	kVA (kW)				kVA (kW)			
Ratings	450 (360)				408.8 (327)			
Load	1/4	1/2	3/4	Full	1/4	1/2	3/4	Full
gph	6.8	11.6	16.3	20.7	6.4	10.7	14.9	19.1
L/hr	31.03	52.68	74.00	94.15	29.25	48.56	67.85	86.81

<b>Engine</b>	Standby rating	Prime rating
Engine manufacturer	Cummins	
Engine model	QSX15 G8	
Configuration	4 Cycle; In-line; 6 Cylinder Diesel	
Aspiration	Turbocharged and Aftercooled	
Gross engine power output, kWm	500	444
BMEP at set rated load, kPa	2675	2371
Bore, mm	137	
Stroke, mm	169	
Rated speed, rpm	1500	
Piston speed, m/s	8.4	
Compression ratio	17:1	
Lube oil capacity, L	91	
Overspeed limit, rpm	1500 ±10%	
Regenerative power, kW	37	
Governor type	Electronic	
Starting voltage	24 Volts DC	

<b>Fuel flow</b>	
Maximum fuel flow, L/hr	424
Maximum fuel inlet restriction, mm Hg	127
Maximum fuel inlet temperature (°C)	71

<b>Air</b>		
Combustion air, m <sup>3</sup> /min	36.27	32.50
Maximum air cleaner restriction, kPa	3.73 - 6.22	



<b>Exhaust</b>	<b>Standby rating</b>	<b>Prime rating</b>
Exhaust gas flow at set rated load, m <sup>3</sup> /min	82.2	75.3
Exhaust gas temperature, °C	515	488
Maximum exhaust back pressure, kPa	10.2	

<b>Standard set-mounted radiator cooling</b>		
Ambient design, °C	50	
Fan load, KW <sub>m</sub>	16	
Coolant capacity (with radiator), L	24	
Cooling system air flow, m <sup>3</sup> /sec @ 12.7mmH <sub>2</sub> O	11.35	
Total heat rejection, BTU/min	16700	13700
Maximum cooling air flow static restriction mmH <sub>2</sub> O	25.4	

### Open set derating factors kVA (kW)

Note: Standard open genset options running at 400V, 150m above sea level. For enclosed product derates, please refer to datasheet - DD50-CS550.

	<b>27 °C</b>	<b>40 °C</b>	<b>45 °C</b>	<b>50 °C</b>	<b>55 °C</b>
<b>Standby</b>	450 (360)	450 (360)	450 (360)	450 (360)	450 (360)
<b>Prime</b>	408.8 (327)	408.8 (327)	408.8 (327)	408.8 (327)	408.8 (327)


<b>Weights*</b>	<b>Open</b>	<b>Enclosed</b>
Unit dry weight kgs	3987	5292
Unit wet weight kgs	4825	6130

\* Weights represent a set with standard features. See outline drawing for weights of other configurations


<b>Dimensions</b>	<b>Length</b>	<b>Width</b>	<b>Height</b>
Standard open set dimensions	3427	1500	2066
Enclosed set standard dimensions	5106	1553	2447

### Genset outline

#### Open set

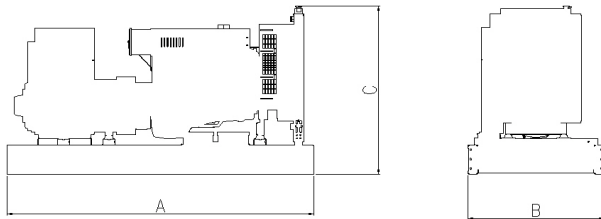

#### Enclosed set

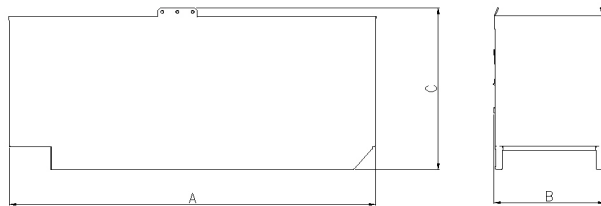

Outlines are for illustrative purposes only. Please refer to the genset outline drawing for an exact representation of this model.

## Alternator data

Feature code	Connection <sup>1</sup>	Temp rise degrees C	Duty <sup>2</sup>	Alternator	Voltage
B886	Wye, 3 Phase	163/125C	S/P	HC5C	380-440V
B726	Wye, 3 Phase	125/105C	S/P	HC5D	380-440V
0	0	0	0	0	0
0	0	0	0	0	0
0	0	0	0	0	0
0	0	0	0	0	0

## Ratings definitions

Emergency Standby Power (ESP)	Limited-Time running Power (LTP):	Prime Power (PRP)	Base Load (Continuous) Power (COP)
Applicable for supplying power to varying electrical load for the duration of power interruption of a reliable utility source. Emergency Standby Power (ESP) is in accordance with ISO 8528. Fuel Stop power in accordance with ISO 3046, AS 2789, DIN 6271 and BS 5514.	Applicable for supplying power to a constant electrical load for limited hours. Limited Time Running Power (LTP) is in accordance with ISO 8528.	Applicable for supplying power to varying electrical load for unlimited hours. Prime Power (PRP) is in accordance with ISO 8528. Ten percent overload capability is available in accordance with ISO 3046, AS 2789, DIN 6271 and BS 5514.	Applicable for supplying power continuously to a constant electrical load for unlimited hours. Continuous Power (COP) in accordance with ISO 8528, ISO 3046, AS 2789, DIN 6271 and BS 5514.

## Formulas for calculating full load currents:

### Three phase output

$$\frac{\text{kW} \times 1000}{\text{Voltage} \times 1.73 \times 0.8}$$

### Single phase output

$$\frac{\text{kW} \times \text{Single Phase Factor} \times 1000}{\text{Voltage}}$$

See your distributor for more information.

Cummins Power Generation  
 Manston Park, Columbus Avenue  
 Manston, Ramsgate  
 Kent CT12 5BF, UK  
 Telephone: +44 (0) 1843 255000  
 Fax: +44 (0) 1843 255902  
 E-Mail: [cpg.uk@cummins.com](mailto:cpg.uk@cummins.com)  
 Web: [www.cumminspower.com](http://www.cumminspower.com)